

1. Check, package inventory.

Each package should contain:

- 1 Banker with Cash Box
- 1 Security Plate (Fig. 1)
- 1 Lexan Protector
- 2 Unit Keys



Fig. 1

- 2 Dialing Instruction Cards
- 1 Decal Phone Sign

2. Find a location to mount your Banker. The model 777 can be mounted to a wall or on a counter.

If mounting on a wall, find **at least one** wall stud that the banker can be fastened to. You may need to use wing nuts or screw taps if a stud is not at that location.

3. Hold Banker to wall and mark the four screw locations. Make sure the top of the Banker is level.

4. Start a screw hole at each marked spot.

5. Remove coin box from phone.

6. Now fit your phone onto the top of the banker. It will fit with no problem. The hand set cord will fit in the slot on the right side of the Banker. Feed the line connection wire through one of the grommets or out the back of the Banker (Fig. 2)

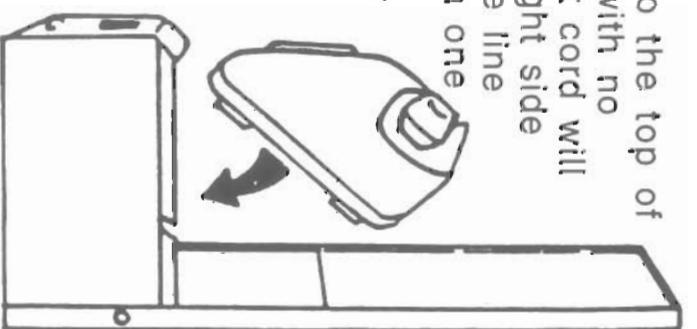


Fig. 2

7. Screw the Banker firmly to the wall.

8. Remove receiver from phone. **Fit** calling instructions and lexan protector on front of Banker. Insert Security plate and lock into place. (Fig. 3)

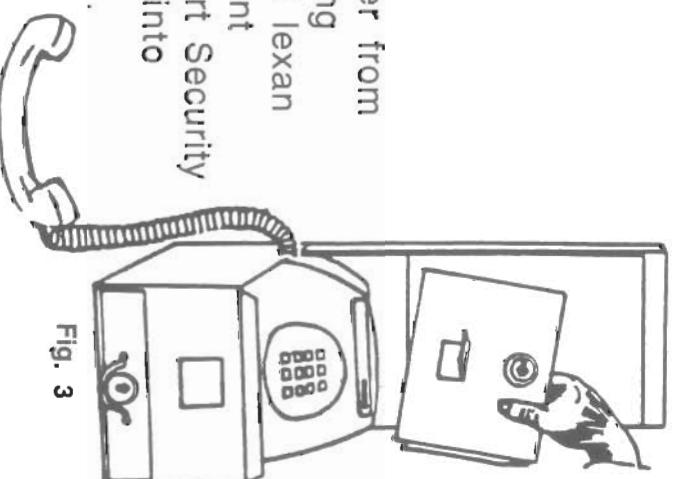


Fig. 3